



# ALKHALEJ EXIM PRIVATE LIMTIETED

EXPORT IMPORT




“  
RAILING  
FOR  
MODERN  
LOOK





**Specifications :**

- Dimension** : 125 mm x 70 mm
- Fitting** : Top Mounted or Concealed
- Glass Thickness** : 12 mm to 21.52 mm
- Glass Height** : 1050 mm upto 1200 mm
- Structural Specifications** : Max 3.75 KPA Wind-load and 100 kg Live-load
- Length** : 3.60 LM or 12 RFT
- Finish** : Mill / Silver / Champagne
- Recommended Fastener** : Hilti HUS - M12 (CSK)

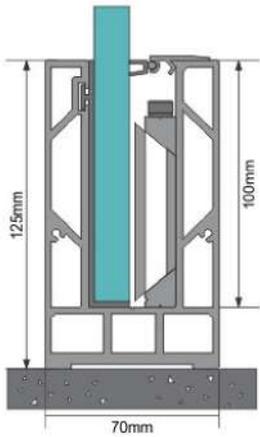

Aluminum U-Channel



U-Channel Top



Top EPDM Gasket



Glass Packing Aluminum




EPDM Gasket



**Specifications :**

- Dimension** : 121 mm x 45 mm
- Fitting** : Top Mounted or Concealed
- Glass Thickness** : 12 mm to 17.52 mm
- Glass Height** : 900 mm upto 1150 mm
- Structural Specifications** : Max 2.50 KPA Wind-load and 100 kg Live-load
- Length** : 3.60 LM or 12 RFT
- Finish** : Mill / Silver / Champagne
- Recommended Fastener** : Hilti HUS - M10 (CSK)

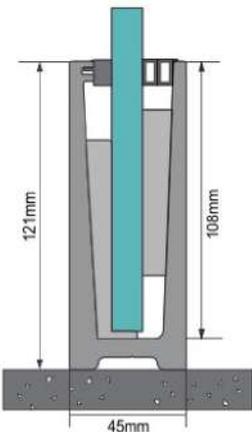

Aluminum U-Channel



Glass Packing ABS




Top EPDM Gasket





**Specifications :**


- Dimension** : 80 mm x 37 mm
- Fitting** : Top Mounted or Concealed
- Glass Thickness** : 12 mm to 13.52 mm
- Glass Height** : 750 mm upto 1050 mm
- Structural Specifications** : Max 1.5 KPA Wind-load and 75 kg Live-load
- Length** : 4.80 LM or 16 RFT
- Finish** : Mill / Silver / Champagne
- Recommended Fastener** : Hilti HUS – M8 (CSK)

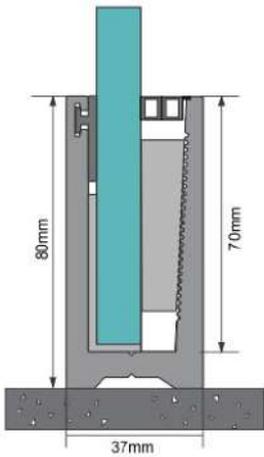

Aluminum U-Channel



Glass Packing ABS

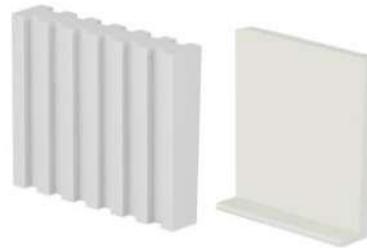


EPDM Gasket



**Specifications :**

- Dimension** : 115 mm x 60 mm (Bracket Wise)
- Bracket Lengths** : 140 mm and 70 mm
- Fitting** : Top Mounted or Side Mounted or Concealed
- Glass Thickness** : 12 mm to 15 mm
- Glass Height** : 900 mm upto 1100 mm
- Structural Specifications** : Max 1.5 KPA Wind-load and 75 kg Live-load
- Length of Side Cover** : 4.80 LM or 16 RFT
- Finish** : Mill / Silver / Champagne
- Recommended Fastener** : Hilti HUS – M10

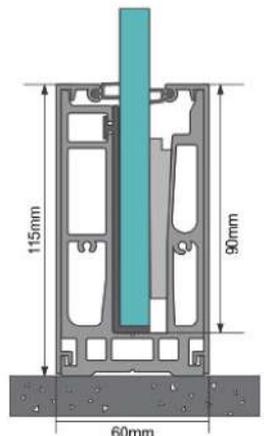

Aluminum Bracket  
70mm & 140mm



Side Cover L & R



EPDM Gasket




Glass Packing ABS





**Specifications :**

- Dimension** : 98 mm x 84 mm (Bracket Wise)
- Bracket Lengths** : 140 mm and 70 mm
- Fitting** : Top Mounted
- Glass Thickness** : 12 mm
- Glass Height** : 750 mm upto 1050 mm
- Structural Specifications** : Max 1.50 KPA Wind-load and 75 kg Live-load
- Finish** : Mill / Silver / Champagne
- Recommended Fastener** : Hilti HUS – M8

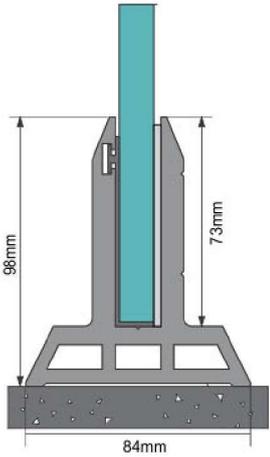

Aluminum T-Bracket  
70mm & 140mm



EPDM Gasket



Glass Aluminum Packing



**Handrails**

**Inclined Handrail**

Product dimension : 82 x 38mm.  
Profile length is 16 feet or 4.8 meter.



**Round Handrail**

Product dimension : Round 50mm.  
Profile length is 16 feet or 4.8 meter.



**Square Handrail**

Product dimension : 50 x 50mm.  
Profile length is 16 feet or 4.8 meter.



**Slim Handrail**

Product dimension : 25 x 25mm.  
Profile length is 16 feet or 4.8 meter.



**Wall Concealed**



**End Caps**





**ADD:**

**908, J.B. TOWER, OOP. DOORDARSHAN KENDRA,  
THALTEJ. AHMADABABA CITY GJ 380054 IN**

**MO:**

**0091957657239**

**EMAIL:**

**INFO@ALKHALEJEXIM.COM**

**SALES@ALKHALEJEXIM.COM**